

BASICSCREEN 1%, 5%, 10%

- Screen fabric with superior light control characteristics to minimise glare
- Offered in 3 openness factors to suit all building orientations
- Standard 100 by Oeko-Tex® certified, free from harmful substances
- Greenguard® certification for low-emission products
- Certified mould resistance


ANVENDELSER



ANGIVELSER OM VÆVNING

	1%	5%	10%
	Semitransparent		
	30% Polyester, 70% PVC		
	480 g/m ²	410 g/m ²	340 g/m ²
	0.65 mm	0.55 mm	0.50 mm
	245 cm		
	250 cm		

VASKEANVISNINGER

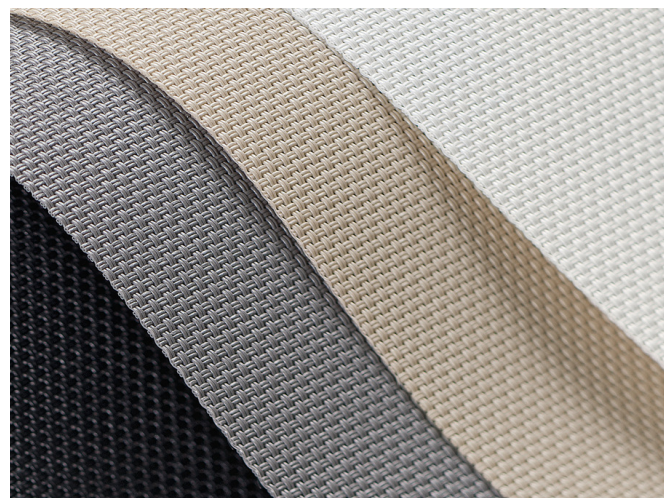

TEKNISKE EGENSKABER

	5-6
	Flammehæmmende
	Optimeret til arbejdsstationer
	Forskellige åbenhedsfaktorer
	Antimikrobielle (ASTM - SGS)
	Kan anvendes i fugtige områder
	Digital udskrivning
	Oeko-Tex, Greenguard
	Særlige farver fra 5'000 m
	Svejsbar

FLAMMEHÆMMENDE

B-s2,d0 (EN 13501-1)
Class 1 (UNI 9176/77)
Type B (BS 5867-2)
NFPA 701



Basicscreen 1%, 5%, 10%

OPTISKE KOEFFICIENTER OG SOLKOEFFICIENTER ($\pm 5\%$, DIN EN 410)


Basicscreen 1%							
Farve	T_V	T_S	R_S	A_S	T_{UV}	F_C	g_{tot}
3001	16.8	20.9	63.6	15.5	2.5	0.53	0.38
3006	2.4	4.3	20.0	75.7	1.9	0.79	0.57
3007	2.9	2.9	3.3	93.8	2.9	0.90	0.65
3015	9.0	14.9	45.2	39.9	2.2	0.64	0.46

Basicscreen 5%							
Farve	T_V	T_S	R_S	A_S	T_{UV}	F_C	g_{tot}
3001	20.3	24.4	60.5	15.1	7.5	0.55	0.40
3006	8.0	10.1	20.3	69.6	7.5	0.80	0.57
3007	7.2	7.2	3.4	89.4	7.2	0.90	0.65
3015	14.4	20.0	43.7	36.3	7.6	0.66	0.47


Basicscreen 10%							
Farve	T_V	T_S	R_S	A_S	T_{UV}	F_C	g_{tot}
3001	28.3	32.0	55.3	12.7	14.9	0.59	0.43
3006	16.0	18.3	18.0	63.7	15.3	0.82	0.59
3007	16.3	16.3	3.1	80.6	16.2	0.91	0.66
3015	22.4	27.8	28.5	43.7	14.2	0.76	0.55

T_V Visible light transmission R_S Solar reflectance T_{UV} UV transmission g_{tot} Total g-value
 T_S Solar transmission A_S Solar absorption F_C Shading factor

$F_C + g_{tot}$: Værdi beregnet med glas: $0.72 / U_g = 1.6 \text{ W/m}^2 \text{ K}$, DIN EN 13363-1

Basicscreen 1%, 5%, 10%

3001 (1%)




3006 (1%)




3007 (1%)



3015 (1%)



3001 (5%)




3006 (5%)




3007 (5%)



3015 (5%)



3001 (10%)



3006 (10%)



3007 (10%)



3015 (10%)

De viste farver er ikke bindende