

COLORAMA 1

- The sheer classic from Silent Gliss made from Trevira CS yarn
- Superb performance across a wide range of shading applications
- Cradle to Cradle Certified™ Bronze
- Standard 100 by Oeko-Tex® certified, free from harmful substances
- Washable up to 72°

ANVENDELSER



ANGIVELSER OM VÆVNING

	Transparent
	Polyester Trevira CS
	135 g/m²
	0.33 mm
	335 cm
	340 cm
	138 cm, 202 cm, 340 cm (400, 401, 402, 410, 427, 429, 440, 442, 447)

VASKEANVISNINGER

							
	-1%	-1.5%	-2%	-0.5%			
							
	-1%						
							

TEKNISKE EGENSKABER

	5-7
	Alpha-w = 0.10 / 0.15
	Flammehæmmende
	Kan anvendes i fugtige områder
	Egnet til Wave
	Digital udskrivning
	Oeko-Tex, Cradle to Cradle
	Særlige farver fra 520 m

FLAMMEHÆMMENDE

B-s1,d0 (EN 13501-1)
 Class 1 (EN 13773)
 Class 1 (UNI 8456)
 B1 (DIN 4102-1)
 M1 (NF P 92-503/5/7)
 Type C (BS 5867-2)
 NFPA 701
 CAN/ULC-S109-14



Colorama 1

OPTISKE KOEFFICIENTER OG SOLKOEFFICIENTER ($\pm 5\%$, DIN EN 410)

Farve	T_V	T_s	R_s	A_s	T_{UV}	F_C	g_{tot}
400	52.9	53.1	44.8	2.1	51.5	0.68	0.49
401	51.5	52.4	40.6	7.0	41.4	0.70	0.51
402	54.4	54.1	41.6	4.3	45.7	0.70	0.50
407	36.6	45.4	35.4	19.2	31.8	0.73	0.53
408	41.4	46.5	34.3	19.2	31.5	0.74	0.53
409	17.5	35.1	26.5	38.4	19.7	0.78	0.56
410	55.3	55.1	42.4	2.5	47.4	0.69	0.50
411	23.7	39.5	29.0	31.5	27.1	0.77	0.55
413	31.1	43.1	33.3	23.6	31.3	0.74	0.53
415	49.1	48.1	40.1	11.8	33.4	0.70	0.50
420	19.3	39.2	27.0	33.8	20.1	0.78	0.56
422	37.3	44.4	34.3	21.3	25.2	0.74	0.53
423	23.1	41.1	29.7	29.2	21.9	0.76	0.55
427	13.0	32.7	24.8	42.5	15.8	0.79	0.57
428	29.3	40.4	33.4	26.2	19.9	0.74	0.53
429	37.8	46.7	35.4	17.9	34.3	0.73	0.53
440	50.5	52.4	39.5	8.1	43.2	0.71	0.51
441	50.6	52.2	41.2	6.6	44.2	0.70	0.50
442	47.8	51.3	39.3	9.4	42.4	0.71	0.51
443	22.3	37.8	27.4	34.8	20.7	0.77	0.56
445	28.6	41.7	31.0	27.3	27.7	0.75	0.54
446	22.0	37.8	27.3	34.9	22.3	0.77	0.56
447	30.6	42.4	32.8	24.8	28.8	0.74	0.54
450	45.7	46.0	43.0	11.0	22.8	0.68	0.49
463	46.1	50.0	38.4	11.6	38.5	0.71	0.51
469	36.1	44.8	38.9	16.3	35.0	0.71	0.51
476	37.9	45.6	39.1	15.3	34.0	0.71	0.51
477	31.0	40.2	39.4	20.4	24.2	0.70	0.50
478	13.2	29.7	30.7	39.6	11.9	0.75	0.54
479	31.7	38.3	37.8	23.9	16.9	0.71	0.51

T_V Visible light transmission

R_s Solar reflectance

T_{UV} UV transmission

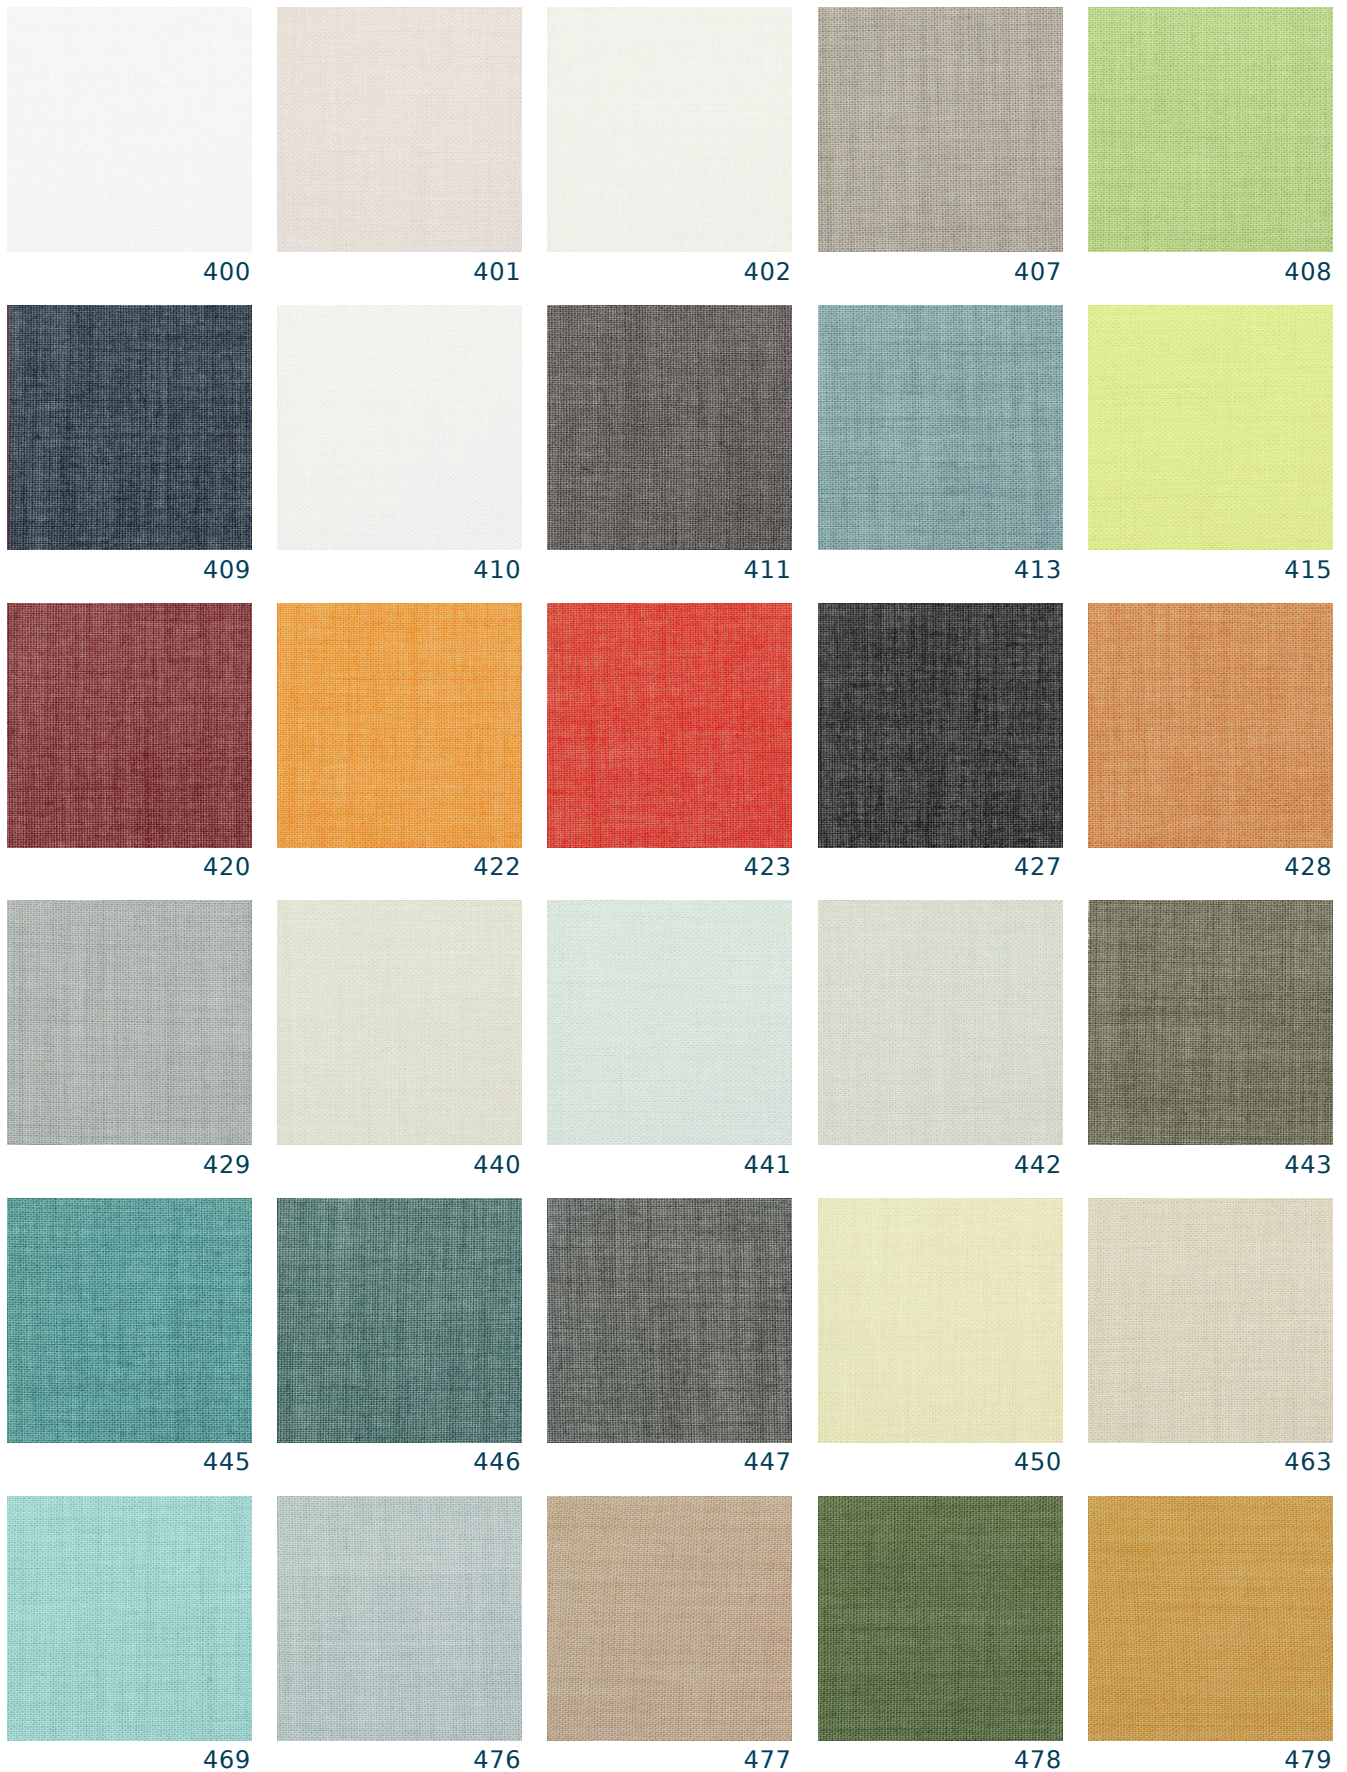
g_{tot} Total g-value

T_s Solar transmission

A_s Solar absorption

F_C Shading factor

$F_C + g_{tot}$: Værdi beregnet med glas: $0.72 / U_g = 1.6 \text{ W/m}^2 \text{ K}$, DIN EN 13363-1

Colorama 1


De viste farver er ikke bindende