

COLORAMA 2

- The classic from Silent Gliss made from Trevira CS yarn
- Superb performance across a wide range of shading applications
- Cradle to Cradle Certified™ Bronze
- Standard 100 by Oeko-Tex® certified, free from harmful substances
- Washable up to 72°
- Proven acoustic properties

ANVENDELSER



ANGIVELSER OM VÆVNING

	Semitransparent
	Polyester Trevira CS
	250 g/m ²
	0.52 mm
	335 cm
	340 cm
	8.9 cm, 12.7 cm, 138 cm, 202 cm, 340 cm (400, 401, 402, 410, 427, 429, 440, 442, 447)

VASKEANVISNINGER

							
	-1%	-1.5%	-2%	-0.5%			
							
	-1%						
							

TEKNISKE EGENSKABER

	5-7
	Alpha-w = 0.40 / 0.65
	Flammehæmmende
	Kan anvendes i fugtige områder
	Egnet til Wave
	Digital udskrivning
	Oeko-Tex, Cradle to Cradle
	Særlige farver fra 240 m

FLAMMEHÆMMENDE

B-s1,d0 (EN 13501-1)
 Class 1 (EN 13773)
 Class 1 (UNI 8456)
 B1 (DIN 4102-1)
 M1 (NF P 92-503/5/7)
 Type C (BS 5867-2)
 NFPA 701



Colorama 2

OPTISKE KOEFFICIENTER OG SOLKOEFFICIENTER ($\pm 5\%$, DIN EN 410)

Farve	T_V	T_s	R_s	A_s	T_{UV}	F_C	g_{tot}
400	36.2	36.3	60.6	3.1	35.1	0.59	0.40
401	31.8	33.3	55.9	10.8	19.9	0.56	0.42
402	38.3	37.8	56.0	6.2	27.2	0.59	0.43
407	12.7	25.4	44.8	29.8	9.4	0.65	0.47
408	17.4	25.6	45.6	28.8	8.4	0.65	0.47
409	2.9	18.6	32.1	49.3	3.7	0.73	0.52
410	38.2	37.3	58.9	3.8	28.7	0.57	0.41
411	2.9	19.7	36.1	44.2	4.5	0.70	0.51
413	8.3	23.1	41.2	35.7	8.1	0.67	0.49
415	29.0	28.7	54.0	17.3	11.0	0.60	0.43
420	3.6	22.0	35.2	42.8	3.5	0.71	0.51
422	14.1	25.4	44.7	29.9	4.2	0.65	0.47
423	6.2	23.8	39.8	36.4	4.1	0.68	0.49
427	2.1	19.0	30.9	50.1	3.0	0.74	0.53
428	9.5	23.7	40.9	35.4	3.5	0.68	0.49
429	13.7	26.3	45.2	28.5	11.7	0.65	0.47
440	28.8	32.6	53.1	14.3	20.2	0.61	0.44
441	30.4	33.5	55.4	11.1	23.4	0.59	0.43
442	24.7	31.0	52.6	16.4	19.0	0.61	0.44
443	4.5	20.2	35.5	44.3	3.8	0.71	0.51
445	6.8	21.5	39.0	39.5	6.2	0.69	0.49
446	3.7	19.0	34.1	46.9	3.8	0.72	0.52
447	8.4	22.7	42.0	35.3	7.2	0.67	0.48
450	28.9	30.4	51.9	17.7	7.8	0.61	0.44
463	25.1	31.4	48.9	19.7	16.5	0.63	0.45
469	16.5	27.5	47.9	24.6	15.4	0.64	0.46
476	18.0	28.8	47.4	23.8	15.1	0.64	0.46
477	6.7	19.7	46.3	34.0	3.4	0.64	0.46
478	1.3	16.4	36.2	47.4	0.90	0.70	0.50
479	8.9	20.2	45.3	34.5	1.1	0.65	0.47

T_V Visible light transmission

R_s Solar reflectance

T_{UV} UV transmission

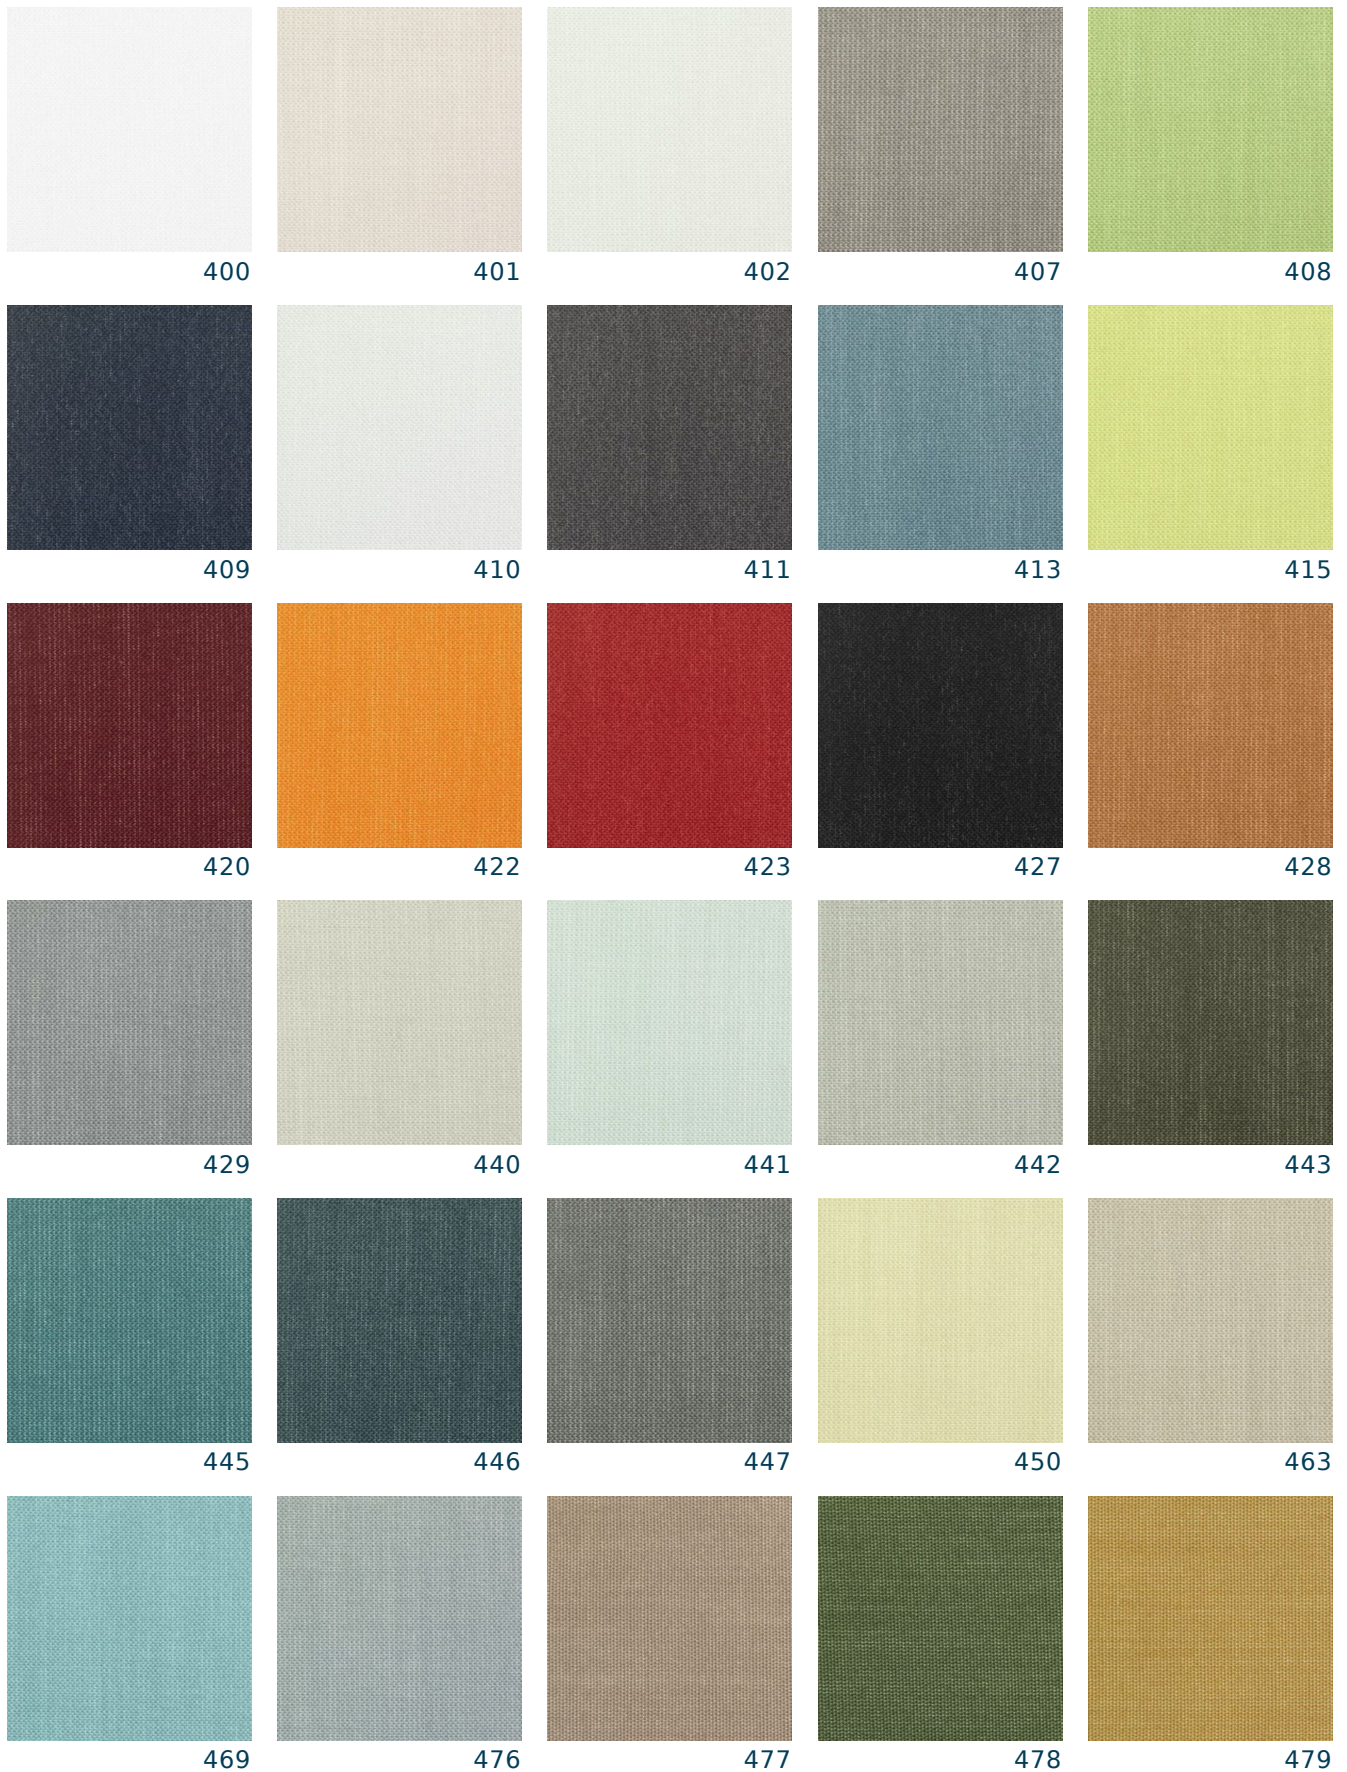
g_{tot} Total g-value

T_s Solar transmission

A_s Solar absorption

F_C Shading factor

$F_C + g_{tot}$: Værdi beregnet med glas: 0.72 / $U_g = 1.6 \text{ W/m}^2 \text{ K}$, DIN EN 13363-1

Colorama 2


De viste farver er ikke bindende