

# COLORAMA DIMOUT

- Exclusive Colorama dimout fabric with colour matched reverse for a uniform appearance inside and out
- Cradle to Cradle Certified™ Bronze
- Standard 100 by Oeko-Tex® certified, free from harmful substances
- Washable up to 72°
- Proven acoustic properties


## ANVENDELSER



## ANGIVELSER OM VÆVNING

|                                                                                     |                      |
|-------------------------------------------------------------------------------------|----------------------|
|    | Semimørklægning      |
|    | Polyester            |
|  | 350 g/m <sup>2</sup> |
|  | 0.80 mm              |
|   | 305 cm               |
|  | 310 cm               |

## VASKEANVISNINGER

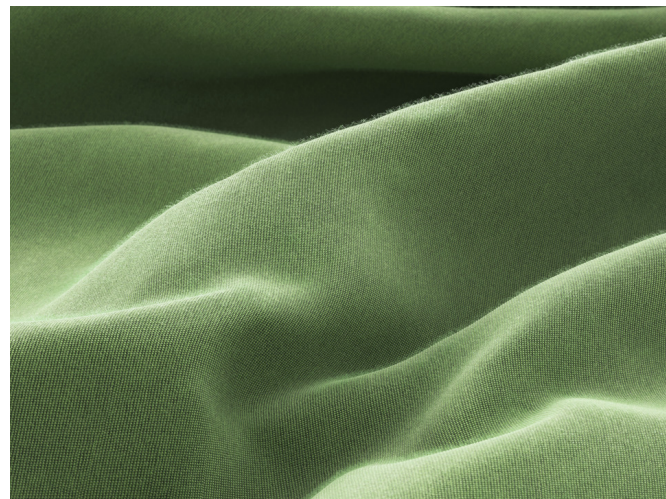

## TEKNISKE EGENSKABER

|                                                                                     |                                |
|-------------------------------------------------------------------------------------|--------------------------------|
|    | 5                              |
|    | Alpha-w = 0.60 / 0.80          |
|  | Flammehæmmende                 |
|  | Kan anvendes i fugtige områder |
|  | Kun krydsbehandling            |
|  | Kun krydsbehandling            |
|  | Oeko-Tex, Cradle to Cradle     |
|  | Særlige farver fra 240 m       |

## FLAMMEHÆMMENDE

Class 1 (EN 13773)  
Type B (BS 5867-2)



## Colorama Dimout

### OPTISKE KOEFFICIENTER OG SOLKOEFFICIENTER ( $\pm 5\%$ , DIN EN 410)

| Farve      | $T_v$ | $T_s$ | $R_s$ | $A_s$ | $F_c$ | $g_{tot}$ |
|------------|-------|-------|-------|-------|-------|-----------|
| <b>408</b> | 0.1   | 0.1   | 31.3  | 68.6  | 0.72  | 0.52      |
| <b>409</b> | 0.0   | 0.1   | 18.0  | 81.9  | 0.80  | 0.58      |
| <b>410</b> | 0.0   | 0.1   | 27.4  | 72.5  | 0.74  | 0.54      |
| <b>411</b> | 0.0   | 0.1   | 20.9  | 79.0  | 0.79  | 0.57      |
| <b>422</b> | 0.0   | 0.1   | 23.2  | 76.7  | 0.77  | 0.55      |
| <b>429</b> | 0.0   | 0.1   | 26.2  | 73.7  | 0.75  | 0.54      |
| <b>446</b> | 0.0   | 0.1   | 19.7  | 80.2  | 0.79  | 0.57      |
| <b>463</b> | 0.1   | 0.1   | 29.9  | 70.0  | 0.73  | 0.52      |
| <b>478</b> | 0.0   | 0.1   | 21.0  | 78.9  | 0.78  | 0.57      |
| <b>479</b> | 0.0   | 0.1   | 25.3  | 74.6  | 0.76  | 0.55      |

$T_v$  Visible light transmission

$R_s$  Solar reflectance

$F_c$  Shading factor

$T_s$  Solar transmission

$A_s$  Solar absorption


$g_{tot}$  Total g-value

$F_c + g_{tot}$ : Værdi beregnet med glas: 0.72 /  $U_g = 1.6 \text{ W/m}^2 \text{ K}$ , DIN EN 13363-1

## Colorama Dimout



408




409




410




411



422



429



446



463



478



479

De viste farver er ikke bindende