

NEWLIFESCREEN ALU

- PVC-free, sustainable screen fabric made from 100 % recycled PET bottles
- Aluminium backing for superior solar reflection values
- Cradle to Cradle Certified™ Bronze
- Standard 100 by Oeko-Tex® certified, free from harmful substances


ANVENDELSER



ANGIVELSER OM VÆVNING

	Semitransparent
	100% genbrugspolyester, med aluminium på bagsiden
	215 g/m ²
	0.55 mm
	235 cm
	240 cm

VASKEANVISNINGER

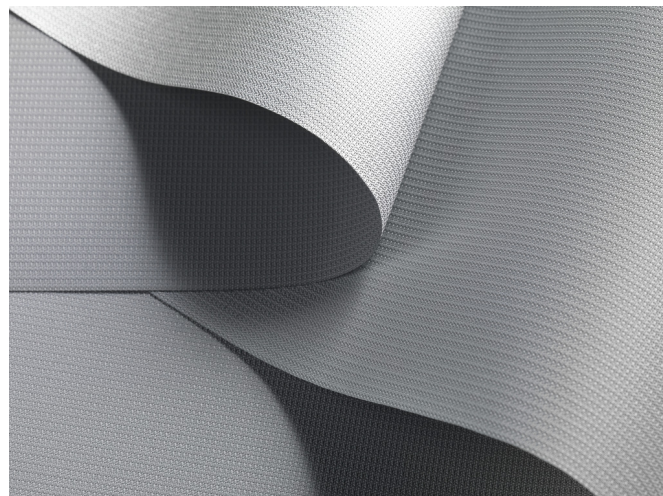

TEKNISKE EGENSKABER

	7
	Flammehæmmende
	Optimeret til arbejdsstationer
	Lav varmetransmittans
	Digital udskrivning
	Oeko-Tex, Cradle to Cradle
	Særlige farver fra 400 m

FLAMMEHÆMMENDE

Class 1 (UNI 8456)
B1 (DIN 4102-1)
M1 (NF P 92-503/5/7)
Type B (BS 5867-2)



Newlifescreeen Alu

OPTISKE KOEFFICIENTER OG SOLKOEFFICIENTER ($\pm 5\%$, DIN EN 410)

Farve	T_V	T_S	R_S	A_S	T_{UV}	F_C	g_{tot}
101	9.6	9.7	59.2	31.1	10.8	0.55	0.39
104	4.1	7.0	56.9	36.1	4.0	0.56	0.40
105	2.9	5.9	57.7	36.4	2.9	0.55	0.40
108	2.4	5.5	59.7	34.8	2.5	0.54	0.39

T_V Visible light transmission

R_S Solar reflectance

T_{UV} UV transmission


g_{tot} Total g-value

T_S Solar transmission


A_S Solar absorption

F_C Shading factor


$F_C + g_{tot}$: Værdi beregnet med glas: $0.72 / U_g = 1.6 \text{ W/m}^2 \text{ K}$, DIN EN 13363-1




101



104



105



108

De viste farver er ikke bindende