

SAFESCREEN

- PVC-free, glass-fibre screen fabric which complies to the strictest fire protection standard
- Woven to maximise daylight whilst minimising glare
- Antimicrobial Sanitized® treatment contributes to comprehensive hygiene management
- Greenguard® certification for low-emission products

ANVENDELSER



ANGIVELSER OM VÆVNING

	Semitransparent
	Glasfiber, belagt
	170 g/m ²
	0.20 mm
	235 cm
	240 cm

VASKEANVISNINGER



TEKNISKE EGENSKABER

	7-8
	Ikke brandfarlig
	Antimikrobielle (sanitiseret)
	Digital udskrivning
	Greenguard
	Særlige farver fra 2'000 m

FLAMMEHÆMMENDE

A2-s1,d0 (EN 13501-1)
 Class 1 (UNI 9176/77)
 A2 (DIN 4102-1)
 M0 (NF P 92-503)
 Type B (BS 5867-2)
 NFPA 701



Yderligere
 oplysninger
silentgliss.com



Safescreen


OPTISKE KOEFFICIENTER OG SOLKOEFFICIENTER ($\pm 5\%$, DIN EN 410)

Farve	T_V	T_S	R_S	A_S	T_{UV}	F_C	g_{tot}
119	36.0	35.0	60.0	5.0	0.08	0.57	0.41
319	32.4	33.0	57.0	10.0	0.07	0.58	0.42
348	29.7	31.0	52.0	17.0	0.09	0.63	0.45
349	13.7	18.0	35.0	47.0	0.07	0.72	0.52
410	23.7	26.0	48.0	26.0	0.07	0.63	0.45
440	5.7	6.0	7.0	87.0	0.05	0.89	0.64
441	6.3	8.0	13.0	79.0	0.05	0.87	0.63

T_V Visible light transmission R_S Solar reflectance T_{UV} UV transmission g_{tot} Total g-value
 T_S Solar transmission A_S Solar absorption F_C Shading factor

$F_C + g_{tot}$: Værdi beregnet med glas: 0.72 / $U_g = 1.6 \text{ W/m}^2 \text{ K}$, DIN EN 13363-1

Safescreen

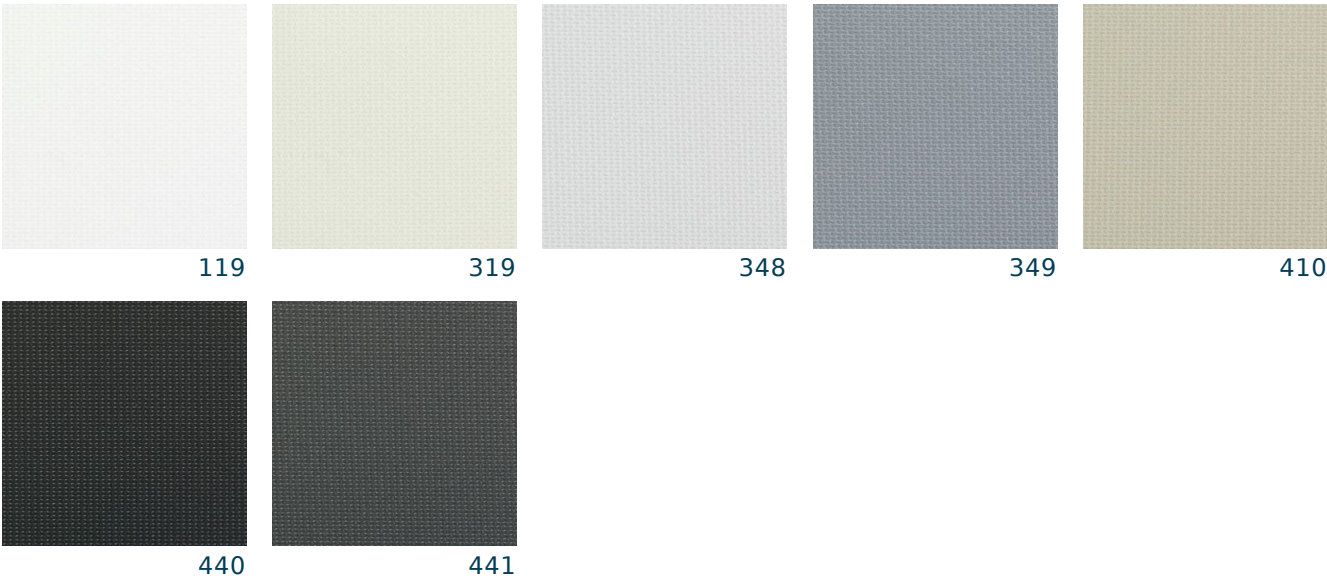

De viste farver er ikke bindende