

TRISCREEN 1%, 3%, 5%

- Screen fabric with superior light control to minimise glare
- Offered in 3 openness factors to suit all building orientations
- White backing across all colours for a uniform external appearance and high solar reflectance
- Greenguard® certification for low-emission products

ANVENDELSER




Ikke egnet: SG 4905,
SG 4900, SG 4907

ANGIVELSER OM VÆVNING

	1%	3%	5%
	Semitransparent		
	64% PVC, 36% glasfiber		
	460 g/m ²	450 g/m ²	430 g/m ²
	0.64 mm	0.63 mm	0.63 mm
	245 cm		
	250 cm		

VASKEANVISNINGER

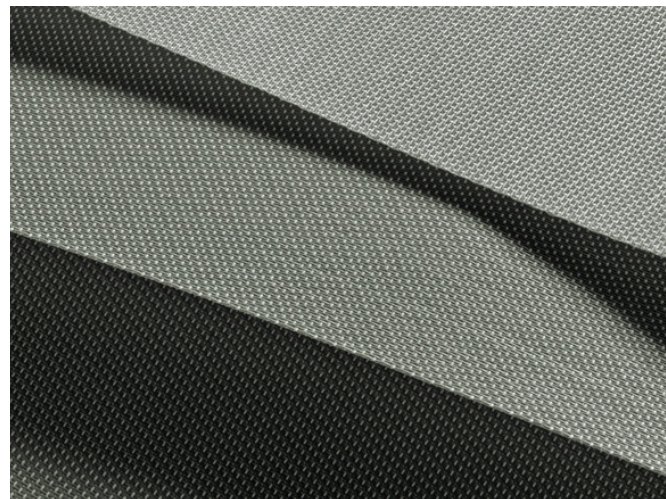

TEKNISKE EGENSKABER

	7-8
	Flammehæmmende
	Optimeret til arbejdsstationer
	Forskellige åbenhedsfaktorer
	Lav varmetransmittans
	Kan anvendes i fugtige områder
	Digital udskrivning
	Greenguard
	Særlige farver fra 10'000 m
	Svejsbar

FLAMMEHÆMMENDE

Class 1 (BS 476)
B1 (DIN 4102-1)
M1 (NF P 92-503/5/7)
Type B (BS 5867-2)



Yderligere
oplysninger
silentgliss.com



Triscreen 1%, 3%, 5%
OPTISKE KOEFFICIENTER OG SOLKOEFFICIENTER ($\pm 5\%$, DIN EN 410)

Triscreen 1%							
Farve	T_V	T_S	R_S	A_S	T_{UV}	F_C	g_{tot}
009	20.4	20.0	70.0	10.0	0.02	0.49	0.35
064	16.8	19.0	64.0	17.0	0.02	0.53	0.38
065	7.2	10.0	54.0	36.0	0.02	0.58	0.42
076	4.8	5.0	49.0	46.0	0.01	0.61	0.44
077	5.4	6.0	50.0	44.0	0.02	0.61	0.44
094	13.0	14.0	60.0	26.0	0.01	0.56	0.40

Triscreen 3%							
Farve	T_V	T_S	R_S	A_S	T_{UV}	F_C	g_{tot}
009	24.5	24.0	67.0	9.0	0.04	0.52	0.37
064	20.7	23.0	63.0	14.0	0.03	0.54	0.39
065	11.2	14.0	54.0	32.0	0.03	0.59	0.43
076	9.1	9.0	49.0	42.0	0.04	0.63	0.45
077	8.9	9.0	50.0	41.0	0.03	0.62	0.45
094	15.4	17.0	61.0	22.0	0.04	0.55	0.40

Triscreen 5%							
Farve	T_V	T_S	R_S	A_S	T_{UV}	F_C	g_{tot}
009	26.2	26.0	66.0	8.0	0.06	0.52	0.38
064	23.2	25.0	61.0	14.0	0.04	0.56	0.40
065	13.9	17.0	53.0	30.0	0.05	0.60	0.43
076	12.0	12.0	42.0	46.0	0.05	0.68	0.49
077	11.8	12.0	50.0	38.0	0.05	0.62	0.45
094	18.6	20.0	57.0	23.0	0.05	0.58	0.41

T_V Visible light transmission R_S Solar reflectance T_{UV} UV transmission g_{tot} Total g-value
 T_S Solar transmission A_S Solar absorption F_C Shading factor

$F_C + g_{tot}$: Værdi beregnet med glas: 0.72 / $U_g = 1.6 \text{ W/m}^2 \text{ K}$, DIN EN 13363-1

Triscreen 1%, 3%, 5%


De viste farver er ikke bindende