

POLYFLAX

- Structured polyester fabric with a distinctively natural linen-look
- Standard 100 by Oeko-Tex® certified, free from harmful substances
- Washable up to 72°

APPLICATIONS



FABRIC PROPERTIES

	Transparent
	Polyester
	100 g/m ²
	0.47 mm
	325 cm
	330 cm

WASHING INSTRUCTIONS



FEATURES / TECHNICAL PROPERTIES

	5
	Flame retardant
	Applicable in humid areas
	Suitable for Wave
	Oeko-Tex
	Special colours from 120 m

FIRE PROTECTION

Class 1 (EN 13773)
Class 1 (UNI 8456)
Type B (BS 5867-2)



Polyflax

OPTICAL AND SOLAR COEFFICIENTS ($\pm 5\%$, DIN EN 410)

Colour	T_V	T_S	R_S	A_S	T_{UV}	F_C	g_{tot}
100	59.9	58.7	37.4	3.9	34.9	0.73	0.52
120	54.2	56.0	36.5	7.5	46.9	0.73	0.53
160	39.7	48.8	30.5	20.7	38.6	0.76	0.55
220	53.1	56.0	35.9	8.1	48.0	0.73	0.53
240	44.7	51.5	33.5	15.0	43.4	0.75	0.54
740	35.2	47.5	25.8	26.7	39.1	0.79	0.57
760	31.8	46.1	24.9	29.0	37.9	0.80	0.57
940	28.7	39.3	30.9	29.8	26.3	0.75	0.54

T_V Visible light transmission

R_S Solar reflectance

T_{UV} UV transmission

g_{tot} Total g-value


T_S Solar transmission

A_S Solar absorption

F_C Shading factor

$F_C + g_{tot}$: Value calculated with glass: 0.72 / $U_g = 1.6 \text{ W/m}^2 \text{ K}$, DIN EN 13363-1

Polyflax

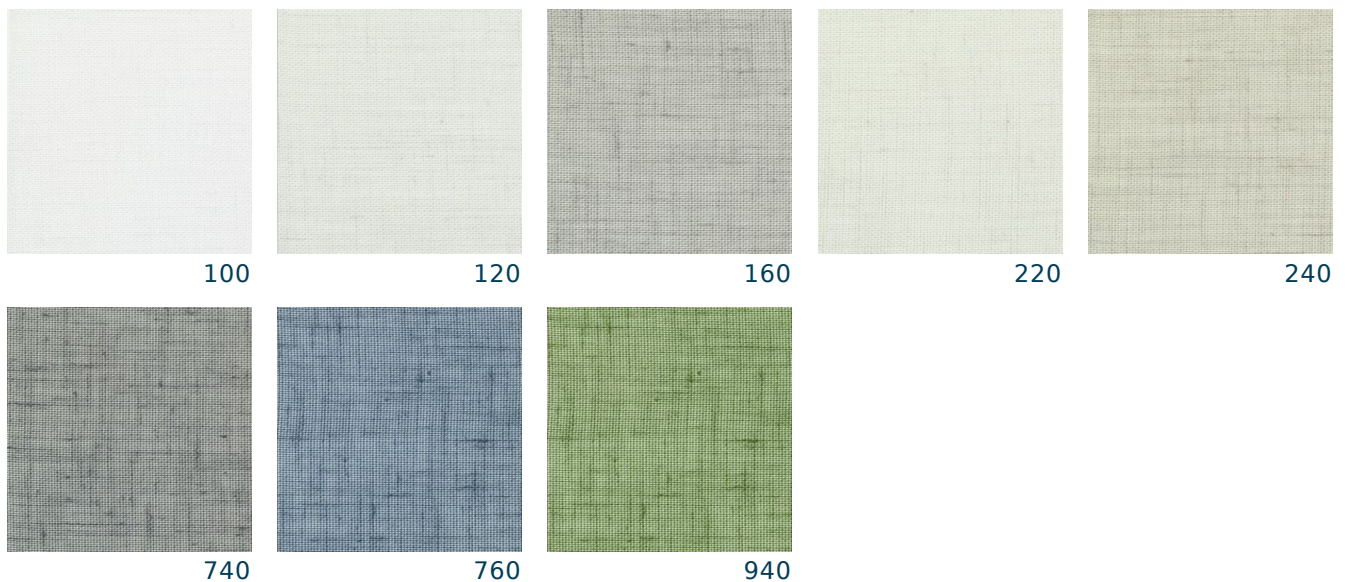

Colours shown are not binding